

OPTOTRONIC Intelligent – DALI NFC

Compact constant current LED driver – Dimmable



Areas of application

- Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
- Suitable for use in luminaires with flexible current setting
- Suitable for indoor SELV installations
- Suitable for luminaires of protection classes I and II
- Suitable for downlights, spotlights and LED panels
- Installation via Cable Clamp Kit possible (depending on version of product)

Product family benefits

- Versatile DALI window driver due to flexible output characteristic
- Locking and unlocking of luminaire/driver data
- Advanced luminaire/driver data (power, energy, operating hours...) for analytics
- DALI-2 certified incl. Parts 251, 252, 253
- Easy and fast output current setting via NFC
- Very high efficiency
- High-quality dimming of 1...100 % by amplitude dimming

Versatile scope of application due to OSRAM DALI Technology:

- Suitable for emergency Installations (acc. to EN 60598-2-22 and IEC 61347-2-13, appendix J) thanks to DC detection (0 Hz, pulsating DC), on/off switchable
- Feedback of power consumption and operating hours (Fit for SMART GRID)
- Suitable for buildings according to EPBD/BREEAM/LEED due to automatic Constant Lumen Output setting



Product family datasheet

Product family features

- Supply voltage: 220...240 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Line voltage: 198...264 V
- According to EN 61347-1, 61347-2-13, 62384
- RI suppression: to EN 55015/CISPR 15
- Immunity according to EN 61547
- Lifetime: up to 100,000 h
- Type of protection: IP20

Product family datasheet

Technical data

Electrical data

Product description	Nominal input voltage	Mains frequency	Input voltage AC	Input voltage DC	Total harmonic distortion	Power factor λ
OTi DALI 15/220...240/1A0 NFC	220...240 V	0/50/60 Hz	198...264 V ¹⁾	176...276 V	< 10 % ²⁾	0.38C...0.95
OTi DALI 25/220...240/700 NFC	220...240 V	0/50/60 Hz	198...264 V ¹⁾	176...276 V	< 10 % ²⁾	0.54C...0.99
OTi DALI 35/220...240/1A0 NFC	220...240 V	0/50/60 Hz	198...264 V ¹⁾	176...276 V	< 10 % ²⁾	0.56C...0.98
OTi DALI 50/220...240/1A4 NFC	220...240 V	0/50/60 Hz	198...264 V ¹⁾	176...276 V	< 10 % ²⁾	0.82C...0.98

Product description	Efficiency in full-load	Device power loss	Inrush current	Max. ECG no. on circuit breaker 10 A (B)	Max. ECG no. on circuit breaker 10 A (C)
OTi DALI 15/220...240/1A0 NFC	88 % ³⁾	2.4 W	5 A ⁴⁾	82	-
OTi DALI 25/220...240/700 NFC	88 % ³⁾	-	15 A ⁴⁾	18	-
OTi DALI 35/220...240/1A0 NFC	90 % ³⁾	-	15 A ⁴⁾	18	-
OTi DALI 50/220...240/1A4 NFC	91 % ³⁾	6.2 W	30 A ¹¹⁾	12	-

Product description	Max. ECG no. on circuit breaker 16 A (C)	Max. ECG no. on circuit breaker 16 A (B)	Max. ECG no. on circuit breaker 25 A (B)	Surge capability (L/N-Ground)	Surge capability (L-N)
OTi DALI 15/220...240/1A0 NFC	-	130	-	2 kV	1 kV
OTi DALI 25/220...240/700 NFC	-	28	-	2 kV	1 kV
OTi DALI 35/220...240/1A0 NFC	-	28	-	2 kV	1 kV
OTi DALI 50/220...240/1A4 NFC	-	20	-	2 kV	1 kV

Product description	Nominal output voltage	U-OUT (working voltage)	Nominal output current	Default output current	Output current tolerance
OTi DALI 15/220...240/1A0 NFC	7.5...54 V ⁵⁾	60 V	150...1050 mA ⁶⁾	350 mA	±3 %
OTi DALI 25/220...240/700 NFC	15...54 V ⁵⁾	60 V	180...700 mA ⁶⁾	500 mA	±3 %
OTi DALI 35/220...240/1A0 NFC	15...54 V ⁵⁾	60 V	350...1050 mA ⁶⁾	700 mA	±3 %
OTi DALI 50/220...240/1A4 NFC	15...54 V ⁵⁾	60 V	600...1400 mA ⁶⁾	1050 mA	±3 %

Product description	Output ripple current (100 Hz)	Output PSTLM	Output SVM	Nominal output power
OTi DALI 15/220...240/1A0 NFC	< 2 % ⁷⁾	≤1	≤0.4	18 W ⁸⁾
OTi DALI 25/220...240/700 NFC	< 3 % ⁷⁾	≤1	≤0.4	27 W ⁹⁾
OTi DALI 35/220...240/1A0 NFC	< 3 % ⁷⁾	≤1	≤0.4	35 W ¹⁰⁾
OTi DALI 50/220...240/1A4 NFC	< 3 % ⁷⁾	≤1	≤0.4	55 W ¹²⁾

Product family datasheet

Product description	Maximum output power	Networked standby power	Power loss in stand-by mode	Galvanic isolation primary/secondary
OTi DALI 15/220...240/1A0 NFC	18 W	≤0.27 W ³⁾	≤0.27 W	SELV
OTi DALI 25/220...240/700 NFC	27 W	≤0.10 W ³⁾	0.1 W	SELV
OTi DALI 35/220...240/1A0 NFC	35 W	≤0.10 W ³⁾	0.1 W	SELV
OTi DALI 50/220...240/1A4 NFC	55 W	≤0.15 W ³⁾	<0.15 W	SELV

Product description	Current set	Galvanic isolation DALI/output	Galvanic isolation DALI/mains
OTi DALI 15/220...240/1A0 NFC	DALI / NFC	SELV	Basic
OTi DALI 25/220...240/700 NFC	DALI / NFC	SELV	SELV
OTi DALI 35/220...240/1A0 NFC	DALI / NFC	SELV	SELV
OTi DALI 50/220...240/1A4 NFC	DALI / NFC	SELV	SELV

- 1) Permitted voltage range
- 2) At full load, 220...240 V, 50 Hz / see graphs
- 3) at 230 V, 50 Hz
- 4) $t_{width} = 220 \mu s$ (measured at 50 % I_{peak})
- 5) Maximum 60 V
- 6) ±3%
- 7) Ripple average at 100 Hz
- 8) Partial load 3...18 W
- 9) Partial load 7...27 W
- 10) Partial load 15...35 W
- 11) $t_{width} = 200 \mu s$ (measured at 50 % I_{peak})
- 12) Partial load 22...55 W


Dimensions & weight

Product description	Product weight	Cable cross-section, input side	Cable cross-section, output side	Wire preparation length, input side	Wire preparation length, output side
OTi DALI 15/220...240/1A0 NFC	100.00 g	0.2...1.5 mm ² ¹⁾	0.2...1.5 mm ² ¹⁾	8.0...9.0 mm	8.0...9.0 mm
OTi DALI 25/220...240/700 NFC	145.00 g	0.2...1.5 mm ² ¹⁾	0.2...1.5 mm ² ¹⁾	8.0...9.0 mm	8.0...9.0 mm
OTi DALI 35/220...240/1A0 NFC	145.00 g	0.2...1.5 mm ² ¹⁾	0.2...1.5 mm ² ¹⁾	8.0...9.0 mm	8.0...9.0 mm
OTi DALI 50/220...240/1A4 NFC	175.00 g	0.2...1.5 mm ² ¹⁾	0.2...1.5 mm ² ¹⁾	8.0...9.0 mm	8.0...9.0 mm


Product description	Height	Width	Length	Mounting hole spacing, length	Mounting hole spacing, width
OTi DALI 15/220...240/1A0 NFC	30.0 mm	53.0 mm	95.0 mm		
OTi DALI 25/220...240/700 NFC	29.5 mm	67.0 mm	103.0 mm	94.0 mm	58.0 mm
OTi DALI 35/220...240/1A0 NFC	29.5 mm	67.0 mm	103.0 mm	94.0 mm	58.0 mm
OTi DALI 50/220...240/1A4 NFC	25.0 mm	75.0 mm	110.0 mm	99.0 mm	64.0 mm

- 1) Solid or flexible leads


Product line drawing

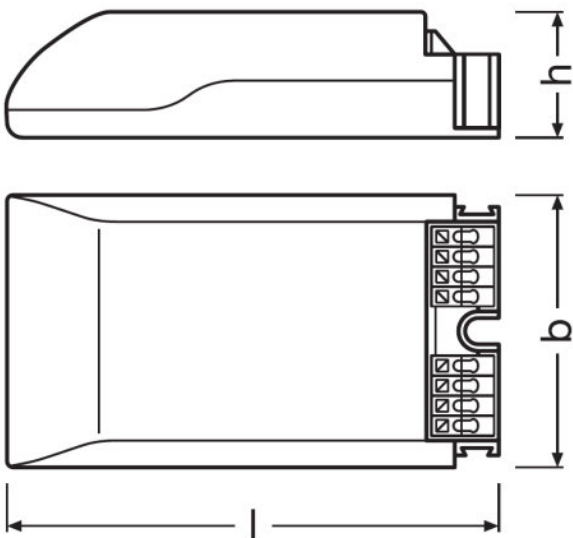


OTi DALI 15/220...240/1A0 NFC

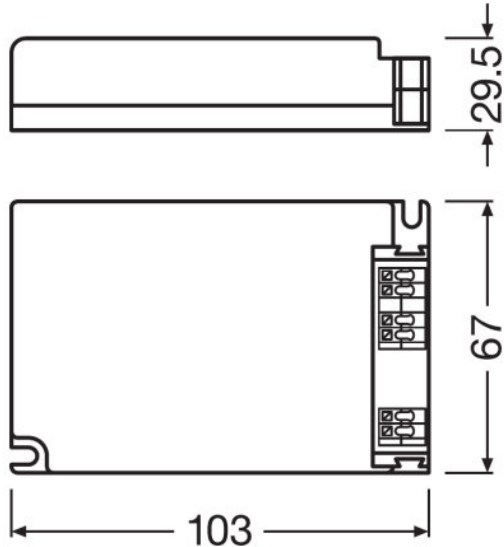

OTi DALI 25/220...240/700 NFC

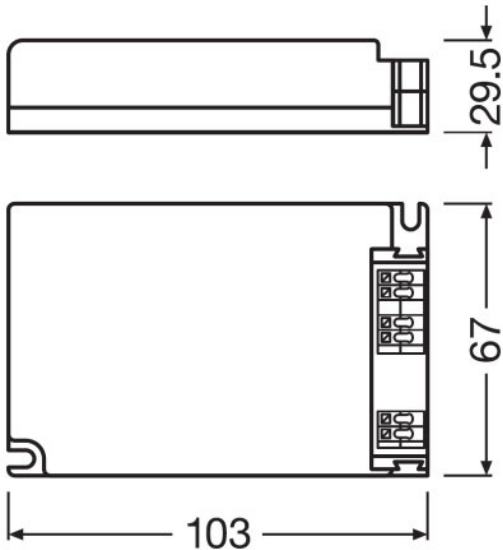

OTi DALI 35/220...240/1A0 NFC

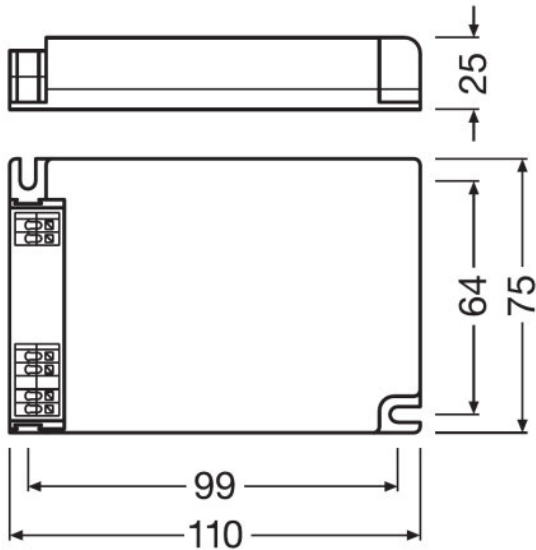

OTi DALI 50/220...240/1A4 NFC

Colors & materials

Product description	Casing material
OTi DALI 15/220...240/1A0 NFC	Plastic
OTi DALI 25/220...240/700 NFC	Plastic
OTi DALI 35/220...240/1A0 NFC	Plastic
OTi DALI 50/220...240/1A4 NFC	Plastic

Temperatures & operating conditions

Product description	Ambient temperature range	Maximum temperature at tc test point	Max.housing temperature in case of fault	Temperature range at storage
OTi DALI 15/220...240/1A0 NFC	-20...+50 °C	80 °C ¹⁾	110 °C	-40...+85 °C
OTi DALI 25/220...240/700 NFC	-20...+50 °C	75 °C ¹⁾	110 °C	-40...+85 °C
OTi DALI 35/220...240/1A0 NFC	-20...+50 °C	80 °C ¹⁾	110 °C	-40...+85 °C
OTi DALI 50/220...240/1A4 NFC	-20...+50 °C	80 °C ¹⁾	110 °C	-40...+85 °C

Product description	Permitted rel. humidity during operation
OTi DALI 15/220...240/1A0 NFC	5...85 % ²⁾
OTi DALI 25/220...240/700 NFC	5...85 % ²⁾
OTi DALI 35/220...240/1A0 NFC	5...85 % ²⁾
OTi DALI 50/220...240/1A4 NFC	5...85 % ²⁾

¹⁾ Maximum at the Tc-point

²⁾ Maximum 56 days/year at 85 %

Lifespan

Product description	ECG lifetime
OTi DALI 15/220...240/1A0 NFC	50000 / 100000 h ¹⁾
OTi DALI 25/220...240/700 NFC	50000 / 100000 h ²⁾
OTi DALI 35/220...240/1A0 NFC	50000 / 100000 h ²⁾
OTi DALI 50/220...240/1A4 NFC	50000 / 100000 h ¹⁾

¹⁾ T_c = 80°C, 0.2% / 1,000 h failure rate / T_c = 70°C, 0.1% / 1,000 h failure rate

²⁾ T_c = 75°C, 0.2% / 1,000 h failure rate / T_c = 65°C, 0.1% / 1,000 h failure rate

Additional product data

Product description	Predecessor EAN	Encapsulated
OTi DALI 15/220...240/1A0 NFC	4052899548190	
OTi DALI 25/220...240/700 NFC	4052899548213	
OTi DALI 35/220...240/1A0 NFC	4052899548237	No
OTi DALI 50/220...240/1A4 NFC	4052899548251	

Capabilities

Product description	Dimmable	Dimming interface	Dimming range	Dimming method
OTi DALI 15/220...240/1A0 NFC	Yes	DALI-2 / Touch DIM / Touch DIM Sensor	1...100 %	Amplitude Modulation
OTi DALI 25/220...240/700 NFC	Yes	DALI-2 / Touch DIM / Touch DIM Sensor	1...100 %	Amplitude Modulation
OTi DALI 35/220...240/1A0 NFC	Yes	DALI-2 / Touch DIM / Touch DIM Sensor	1...100 %	Amplitude Modulation
OTi DALI 50/220...240/1A4 NFC	Yes	DALI-2 / Touch DIM / Touch DIM Sensor	1...100 %	Amplitude Modulation
Product description	Overheating protection	Overload protection	Short-circuit protection	No-load proof
OTi DALI 15/220...240/1A0 NFC	Automatic reversible	Automatic reversible	Automatic reversible	Yes
OTi DALI 25/220...240/700 NFC	Automatic reversible	Automatic reversible	Automatic reversible	Yes
OTi DALI 35/220...240/1A0 NFC	Automatic reversible	Automatic reversible	Automatic reversible	Yes
OTi DALI 50/220...240/1A4 NFC	Automatic reversible	Automatic reversible	Automatic reversible	Yes
Product description	Intended for no-load operation	Max. cable length to lamp/LED module	Suitable for fixtures with prot. class	Type of connection, input side
OTi DALI 15/220...240/1A0 NFC	No	2.0 m ¹⁾	I / II	Push terminal
OTi DALI 25/220...240/700 NFC	No	2.0 m ¹⁾	I / II	Push terminal
OTi DALI 35/220...240/1A0 NFC	No	2.0 m ¹⁾	I / II	Push terminal
OTi DALI 50/220...240/1A4 NFC	No	2.0 m ¹⁾	I / II	Push terminal
Product description	Type of connection, output side	DALI-2 Energy Data	Control interface	
OTi DALI 15/220...240/1A0 NFC	Push terminal	Yes ²⁾	DALI-2	
OTi DALI 25/220...240/700 NFC	Push terminal	Yes ²⁾	DALI-2	
OTi DALI 35/220...240/1A0 NFC	Push terminal	Yes ²⁾	DALI-2	
OTi DALI 50/220...240/1A4 NFC	Push terminal	Yes ²⁾	DALI-2	
Product description	Suitable for through-wiring	DALI-2 Diagnostic Data	Number of channels	Suitable for emergency lighting
OTi DALI 15/220...240/1A0 NFC	No	Yes ³⁾	1	Yes
OTi DALI 25/220...240/700 NFC	Yes with optional cable clamp	Yes ³⁾	1	Yes
OTi DALI 35/220...240/1A0 NFC	Yes with optional cable clamp	Yes ³⁾	1	Yes
OTi DALI 50/220...240/1A4 NFC	Yes with optional cable clamp	Yes ³⁾	1	Yes
Product description	Constant lumen function	Programming interface		
OTi DALI 15/220...240/1A0 NFC	Programmable	DALI, NFC		
OTi DALI 25/220...240/700 NFC	Programmable	DALI, NFC		
OTi DALI 35/220...240/1A0 NFC	Programmable	DALI, NFC		
OTi DALI 50/220...240/1A4 NFC	Programmable	DALI, NFC		

Product family datasheet

¹⁾ Output wires must be routed as close as possible to each other

²⁾ Acc. DALI part 252

³⁾ Acc. DALI part 253

Programming

Product description	Tuner4TRONIC	Tuner4TRONIC Field App	Programming device
OTi DALI 15/220...240/1A0 NFC	Yes	Yes	DALI / NFC
OTi DALI 25/220...240/700 NFC	Yes	Yes	DALI / NFC
OTi DALI 35/220...240/1A0 NFC	Yes	Yes	DALI / NFC
OTi DALI 50/220...240/1A4 NFC	Yes	Yes	DALI / NFC

Product description	Box programming
OTi DALI 15/220...240/1A0 NFC	
OTi DALI 25/220...240/700 NFC	Yes
OTi DALI 35/220...240/1A0 NFC	Yes
OTi DALI 50/220...240/1A4 NFC	Yes

Programmable features

Product description	Operating Current	Constant Lumen	Lamp Operating Time
OTi DALI 15/220...240/1A0 NFC	Yes	Yes	Yes
OTi DALI 25/220...240/700 NFC	Yes	Yes	Yes
OTi DALI 35/220...240/1A0 NFC	Yes	Yes	Yes
OTi DALI 50/220...240/1A4 NFC	Yes	Yes	Yes

Product description	Driver Guard	DALI Settings	Emergency Mode
OTi DALI 15/220...240/1A0 NFC	Yes	Yes	Yes
OTi DALI 25/220...240/700 NFC	Yes	Yes	Yes
OTi DALI 35/220...240/1A0 NFC	Yes	Yes	Yes
OTi DALI 50/220...240/1A4 NFC	Yes	Yes	Yes

Product description	DALI-2 Luminaire Data	Configuration Lock	Soft Switch Off
OTi DALI 15/220...240/1A0 NFC	Yes ¹⁾	Yes	Yes
OTi DALI 25/220...240/700 NFC	Yes ¹⁾	Yes	Yes
OTi DALI 35/220...240/1A0 NFC	Yes ¹⁾	Yes	Yes
OTi DALI 50/220...240/1A4 NFC	Yes ¹⁾	Yes	Yes

Product description	Dim to Dark	TouchDIM + Sensor	Corridor Functionality
OTi DALI 15/220...240/1A0 NFC	Yes	Yes	Yes
OTi DALI 25/220...240/700 NFC	Yes	Yes	Yes
OTi DALI 35/220...240/1A0 NFC	Yes	Yes	Yes
OTi DALI 50/220...240/1A4 NFC	Yes	Yes	Yes

Product description	OEM Key
OTi DALI 15/220...240/1A0 NFC	No
OTi DALI 25/220...240/700 NFC	No
OTi DALI 35/220...240/1A0 NFC	No

Product family datasheet

Product description	OEM Key
OTi DALI 50/220...240/1A4 NFC	No

¹⁾ Acc. DALI part 251

Certificates & standards

Product description	Approval marks – approval	Standards	Protection class	Type of protection
OTi DALI 15/220...240/1A0 NFC	CE / EL / ENEC 10 / VDE-EMC / DALI-2	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386/Acc. to IEC 62386-101:Ed2/Acc. to IEC 62386-102:Ed2/Acc. to IEC 62386-207:Ed1	II	IP20
OTi DALI 25/220...240/700 NFC	CE / EL / ENEC 10 / VDE / VDE-EMC / DALI-2 / EAC / MM	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386/Acc. to IEC 62386-101:Ed2/Acc. to IEC 62386-102:Ed2/Acc. to IEC 62386-207:Ed1	II	IP20
OTi DALI 35/220...240/1A0 NFC	CE / EL / ENEC 10 / VDE / VDE-EMC / DALI-2 / EAC / MM	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386/Acc. to IEC 62386-101:Ed2/Acc. to IEC 62386-102:Ed2/Acc. to IEC 62386-207:Ed1	II	IP20
OTi DALI 50/220...240/1A4 NFC	CE / EL / DALI-2 / EAC	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386/Acc. to IEC 62386-101:Ed2/Acc. to IEC 62386-102:Ed2/Acc. to IEC 62386-207:Ed1	II	IP20

Logistical data

Product description	Commodity code
OTi DALI 15/220...240/1A0 NFC	85044083900
OTi DALI 25/220...240/700 NFC	85044083900
OTi DALI 35/220...240/1A0 NFC	85044083900
OTi DALI 50/220...240/1A4 NFC	85044083900

Product family datasheet

Environmental information
Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Product description	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
OTi DALI 15/220...240/1A0 NFC	08-12-2023	4062172061766	Lead
OTi DALI 25/220...240/700 NFC	08-12-2023	4062172017909	Lead
OTi DALI 35/220...240/1A0 NFC	08-12-2023	4062172017923	Lead
OTi DALI 50/220...240/1A4 NFC	25-10-2023	4062172061889	Lead

Product description	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
OTi DALI 15/220...240/1A0 NFC	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	d244606e-44a4-4d9e-917b-1ae3806312cd
OTi DALI 25/220...240/700 NFC	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	52233c09-6851-4c9d-895c-0cdcd2e3acea
OTi DALI 35/220...240/1A0 NFC	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	e84f2d4e-a1d0-441f-838c-49ec83b67ed9
OTi DALI 50/220...240/1A4 NFC	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	a44ca5eb-0aa7-437c-80e1-726dedd7c300

Application advice

For more detailed application information and graphics please see product datasheet.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction OPTOTRONIC LED Power Supply
	User instruction OPTOTRONIC LED Power Supply
	Certificates OT EMC 40050085 200220

Product family datasheet

	Certificates OTI DALI 15 NFC EATON AM35709 210720
	Certificates OTI DALI 15 NFC INOTEC AM35709 210720
	Certificates OTI DALI NFC BIS 45164 231023
	Certificates OTI DALI 15 NFC CCC 2020171002003468 071223
	Certificates OTI DALI 15 NFC CCC 2020171002003469 071223
	Certificates OTI DALI 15 NFC CCC 2020171002003099 081223
	Certificates OTI DALI 15 NFC CCC 2020171002003100 081223
	Certificates OT ENEC 40038447 260623
	Certificates OT EMC 40044675 031022
	Declarations of conformity OTI DALI NFC UK DoC 4291512 240221
	Declarations of conformity OTI DALI NFC CE 3758701 161023
	CAD data OTI DALI 15 NFC IGS 170120
	CAD data OTI DALI 15 NFC STEP 170120
	CAD Data 2-dim OTI DALI 15 NFC CAD2PDF 170120
	CAD data 3-dim OTI DALI 15 NFC CAD3PDF 170120
	User instruction OPTOTRONIC LED Power Supply
	User instruction OPTOTRONIC LED Power Supply
	Certificates OTI DALI 25 NFC INOTEC 080121
	Certificates OTI DX DALI NFC CB DE1 63108 190220
	Certificates OTI DALI 25 NFC EATON 080121 (EN)
	Certificates OTI DALI DX 25 35 NFC CCC 2020171002003129 071223
	Certificates OTI DALI DX 25 35 NFC CCC 2020171002003130 071223
	Declarations of conformity OTI DX DALI NFC CE 3770568 040923

Product family datasheet

	Declarations of conformity OTI DALI DX NFC UK DoC 4281072 040923
	CAD data OTI DALI 25 35 NFC IGS 280120
	CAD data OTI DALI 25 35 NFC STEP 280120
	CAD Data 2-dim OTI DALI 25 35 NFC CAD2PDF 280120
	CAD data 3-dim OTI DALI 25 35 NFC CAD3PDF 280120
	Certificates OTi DALI 35 1A0 NFC EAT AM22187 090120
	Certificates OTi DALI 35 1A0 NFC INO AM22187 090120
	Certificates OTI DALI 35 NFC INOTEC 080121
	Certificates OTI DALI 35 NFC EATON 080121
	User instruction OPTOTRONIC LED Power Supply
	Certificates OTI DALI 50 NFC INOTEC 080121
	Certificates OTI DALI 50 NFC EATON 080121
	CAD data CAD data OTi DALI 50220-2401A4 NFC built in IGS
	CAD data CAD data OTi DALI 50220-2401A4 NFC built in STEP
	CAD data PDF CAD data OTi DALI 50220-2401A4 NFC built in pdf

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Product family datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172061766	OTi DALI 15/220...240/1A0 NFC	Shipping carton box 20	284 mm x 207 mm x 96 mm	5.64 dm ³	2270.00 g
4062172017909	OTi DALI 25/220...240/700 NFC	Shipping carton box 20	218 mm x 158 mm x 155 mm	5.34 dm ³	3037.00 g
4062172017923	OTi DALI 35/220...240/1A0 NFC	Shipping carton box 20	345 mm x 216 mm x 86 mm	6.41 dm ³	3131.00 g
4062172061889	OTi DALI 50/220...240/1A4 NFC	Shipping carton box 20	389 mm x 234 mm x 72 mm	6.55 dm ³	4018.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
OTi DALI 15/220...240/1A0 NFC	OT CABLE CLAMP F-STYLE	▶ 4052899325555
OTi DALI 25/220...240/700 NFC	OT CABLE CLAMP B-STYLE	▶ 4052899077881
OTi DALI 25/220...240/700 NFC	OT CABLE CLAMP B-STYLE TL	▶ 4052899948051
OTi DALI 35/220...240/1A0 NFC	OT CABLE CLAMP B-STYLE	▶ 4052899077881
OTi DALI 35/220...240/1A0 NFC	OT CABLE CLAMP B-STYLE TL	▶ 4052899948051
OTi DALI 50/220...240/1A4 NFC	OT CABLE CLAMP A-STYLE	▶ 4052899089570
OTi DALI 50/220...240/1A4 NFC	OT CABLE CLAMP A-STYLE TL	▶ 4052899325982

Data privacy

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on www.myosram.com and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here. However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.